

T&D Optional Products Catalog

Temperature Sensors




TR-0106 -----	p.2	TR-5320 -----	p.6
TR-0206 -----	p.2	TR-5420 -----	p.6
TR-0306 -----	p.2	TR-5530 -----	p.6
TR-0406 -----	p.3	TR-5620 -----	p.7
TR-0506 -----	p.3	Pt Sensors -----	p.8
TR-0706 -----	p.3		
TR-1106 -----	p.4	Sensor Extension Cables	
TR-1220 -----	p.4	TR-1C30 -----	p.9
TR-1320 -----	p.4	TR-2C30 -----	p.9
TR-5101 -----	p.5	TR-5C10 -----	p.9
TR-5106 -----	p.5		
TR-5220 -----	p.5		

TR-0106



Provided with TR71A2 and TR-71nw

TPE Resin-Shielded Sensor

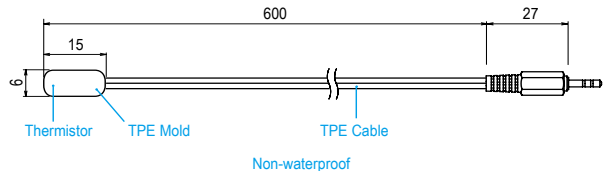


[Unit: mm]

Measurement Range	-40 to 110 °C
Accuracy	Avg. ± 0.3 °C at -20 to 80 °C, Avg. ± 0.5 °C at -40 to -20 °C, 80 to 110 °C
Response Time (90 %)	Approx. 190 sec. (in air)
Waterproof Capacity	None
Note	Can be extended by 3 meters with the Extension Cable TR-1C30 or TR-5C10

TR-0206



Screw-down Sensor

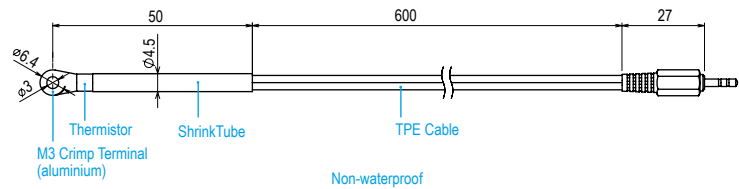


[Unit: mm]

Measurement Range	-40 to 110 °C
Accuracy	Avg. ± 0.3 °C at -20 to 80 °C, Avg. ± 0.5 °C at -40 to -20 °C, 80 to 110 °C
Response Time (90 %)	Approx. 210 sec. (in air)
Waterproof Capacity	None
Note	Can be extended by 3 meters with the Extension Cable TR-1C30 or TR-5C10

TR-0306



Stainless Protection Sensor

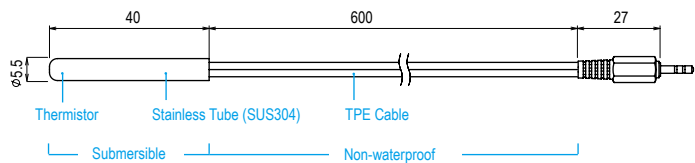


[Unit: mm]

Measurement Range	-40 to 110 °C
Accuracy	Avg. ± 0.3 °C at -20 to 80 °C, Avg. ± 0.5 °C at -40 to -20 °C, 80 to 110 °C
Response Time (90 %)	Approx. 11 sec. (in agitated water)
Waterproof Capacity	Submersible (stainless protection tube)
Note	Can be extended by 3 meters with the Extension Cable TR-1C30 / TR-5C10

TR-0406



Stainless Protection Sensor

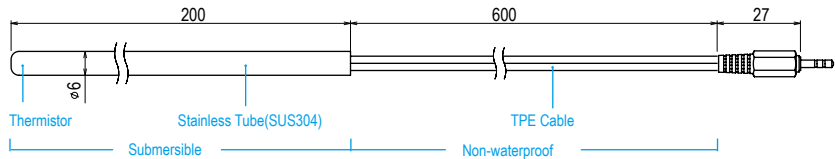


[Unit: mm]

Measurement Range	-40 to 110 °C
Accuracy	Avg. ± 0.3 °C at -20 to 80 °C Avg. ± 0.5 °C at -40 to -20 °C, 80 to 110 °C
Response Time (90 %)	Approx. 15 sec. (in agitated water)
Waterproof Capacity	Submersible (stainless protection tube)
Note	Can be extended by 3 meters with the Extension Cable TR-1C30

TR-0506



Stainless Protection Sensor

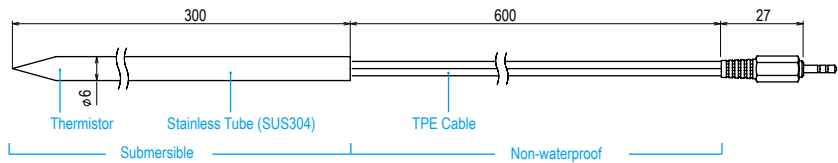


[Unit: mm]

Measurement Range	-40 to 110 °C
Accuracy	Avg. ± 0.3 °C at -20 to 80 °C, Avg. ± 0.5 °C at -40 to -20 °C, 80 to 110 °C
Response Time (90 %)	Approx. 10 sec. (in agitated water)
Waterproof Capacity	Submersible (stainless protection tube)
Note	Can be extended by 3 meters with the Extension Cable TR-1C30 or TR-5C10

TR-0706



Stainless Protection Sensor

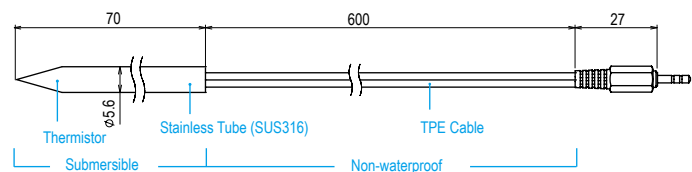


[Unit: mm]

Measurement Range	-40 to 110 °C
Accuracy	Avg. ± 0.3 °C at -20 to 80 °C, Avg. ± 0.5 °C at -40 to -20 °C, 80 to 110 °C
Response Time (90 %)	Approx. 11 sec. (in agitated water)
Waterproof Capacity	Submersible (stainless protection tube)
Note	Can be extended by 3 meters with the Extension Cable TR-1C30 or TR-5C10

TR-1106



Fluoropolymer Coated Sensor

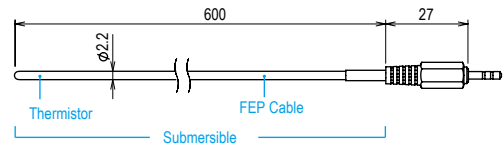


[Unit: mm]

Measurement Range	-60 to 155 °C
Accuracy	Avg. ±0.5 °C at -40 to 80 °C Avg. ±1.0 °C at -60 to -40 °C, 80 to 100 °C Avg. ±2.0 °C at 100 to 155 °C
Response Time (90 %)	Approx. 80 sec. (in air) Approx. 7 sec. (in agitated water)
Waterproof Capacity	Submersible (cable)
Note	Can be extended by 3 meters with the Extension Cable TR-1C30 or TR-5C10

TR-1220



Stainless Protection Sensor

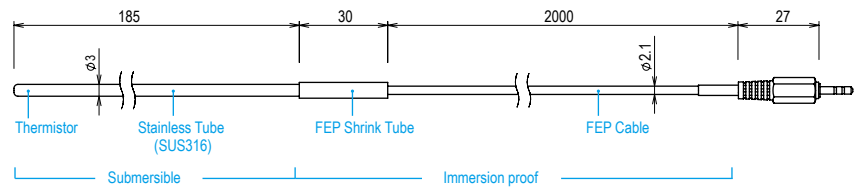


[Unit: mm]

Measurement Range	-60 to 155 °C
Accuracy	Avg. ±0.5 °C at -40 to 80 °C Avg. ±1.0 °C at -60 to -40 °C, 80 to 100 °C Avg. ±2.0 °C at 100 to 155 °C
Response Time (90 %)	Approx. 150 sec. (in air) Approx. 7 sec. (in agitated water)
Waterproof Capacity	Submersible (stainless protection tube) Immersion proof (cable)
Note	Can be extended by 3 meters with the Extension Cable TR-1C30 or TR-5C10

TR-1320



Stainless Protection Sensor

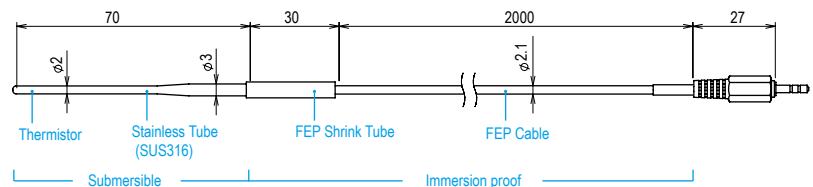


[Unit: mm]

Measurement Range	-60 to 155 °C
Accuracy	Avg. ±0.5 °C at -40 to 80 °C Avg. ±1.0 °C at -60 to -40 °C, 80 to 100 °C Avg. ±2.0 °C at 100 to 155 °C
Response Time (90 %)	Approx. 90 sec. (in air) Approx. 3 sec. (in agitated water)
Waterproof Capacity	Submersible (stainless protection tube) Immersion proof (cable)
Note	Can be extended by 3 meters with the Extension Cable TR-1C30 or TR-5C10

TR-5101



Fluoropolymer Coated Sensor

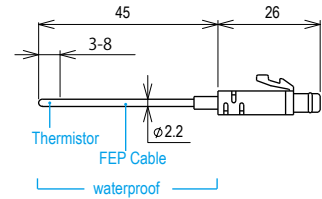


[Unit: mm]

Measurement Range	-60 to 155 °C
Accuracy	Avg. ± 0.3 °C at -20 to 80 °C Avg. ± 0.5 °C at -40 to -20 °C , 80 to 110 °C Avg. ± 1.0 °C at -60 to -40 °C , 110 to 155 °C
Response Time (90 %)	Approx. 80 sec. (in air)
Waterproof Capacity	Waterproof (cable)
Note	Can be extended by 3 meters with the Extension Cable TR-2C30

TR-5106



Fluoropolymer Coated Sensor

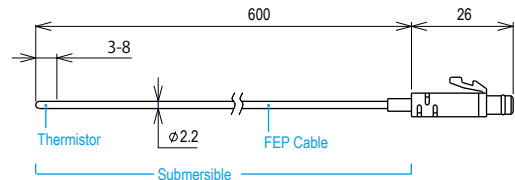


[Unit: mm]

Measurement Range	-60 to 155 °C
Accuracy	Avg. ± 0.3 °C at -20 to 80 °C Avg. ± 0.5 °C at -40 to -20 °C , 80 to 110 °C Avg. ± 1.0 °C at -60 to -40 °C , 110 to 155 °C
Response Time (90 %)	Approx. 80 sec. (in air) Approx. 7 sec. (in agitated water)
Waterproof Capacity	Submersible (cable)
Note	Can be extended by 3 meters with the Extension Cable TR-2C30

TR-5220



Stainless Protection Sensor

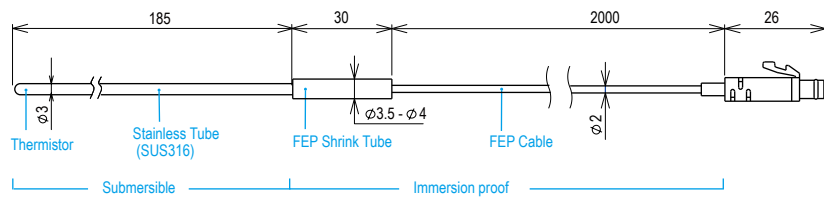


[Unit: mm]

Measurement Range	-60 to 155 °C
Accuracy	Avg. ± 0.3 °C at -20 to 80 °C Avg. ± 0.5 °C at -40 to -20 °C , 80 to 110 °C Avg. ± 1.0 °C at -60 to -40 °C , 110 to 155 °C
Response Time (90 %)	Approx. 150 sec. (in air) Approx. 7 sec. (in agitated water)
Waterproof Capacity	Submersible (stainless protection tube) Immersion proof (cable)
Note	Can be extended by 3 meters with the Extension Cable TR-2C30

TR-5320



Stainless Protection Sensor

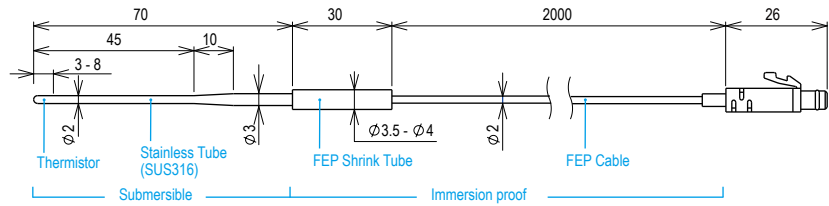


[Unit: mm]

Measurement Range	-60 to 155 °C
Accuracy	Avg. ±0.3 °C at -20 to 80 °C Avg. ±0.5 °C at -40 to -20 °C , 80 to 110 °C Avg. ±1.0 °C at -60 to -40 °C , 110 to 155 °C
Response Time (90 %)	Approx. 90 sec. (in air) Approx. 3 sec. (in agitated water)
Waterproof Capacity	Submersible (stainless protection tube) Immersion proof (cable)
Note	Can be extended by 3 meters with the Extension Cable TR-2C30

TR-5420




Stainless Protection Sensor for Core Temperature

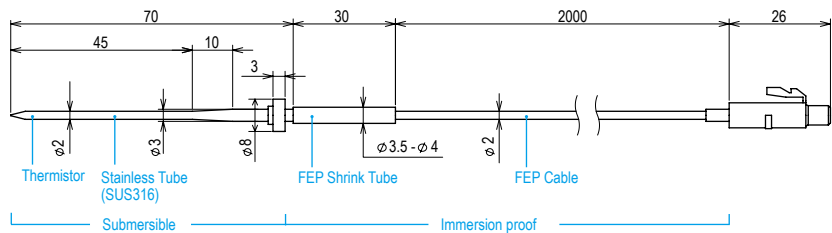


[Unit: mm]

Measurement Range	-60 to 155 °C
Accuracy	Avg. ±0.3 °C at -20 to 80 °C Avg. ±0.5 °C at -40 to -20 °C , 80 to 110 °C Avg. ±1.0 °C at -60 to -40 °C , 110 to 155 °C
Response Time (90 %)	Approx. 90 sec. (in air) Approx. 3 sec. (in agitated water)
Waterproof Capacity	Submersible (stainless protection tube) Immersion proof (cable)
Note	Can be extended by 3 meters with the Extension Cable TR-2C30

TR-5530

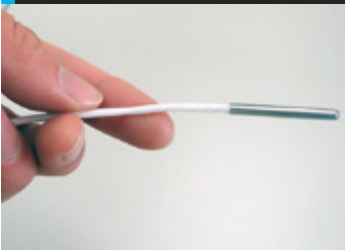


Underwater Sensor

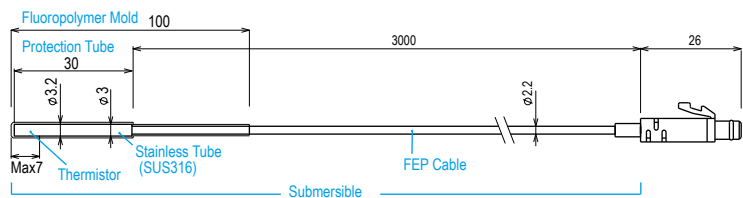


[Unit: mm]

Measurement Range	-60 to 155 °C
Accuracy	Avg. ±0.3 °C at -20 to 80 °C Avg. ±0.5 °C at -40 to -20 °C , 80 to 110 °C Avg. ±1.0 °C at -60 to -40 °C , 110 to 155 °C
Response Time (90 %)	Approx. 150 sec. (in air) Approx. 15 sec. (in agitated water)
Waterproof Capacity	Submersible
Note	Can be extended by 3 meters with the Extension Cable TR-2C30

TR-5620

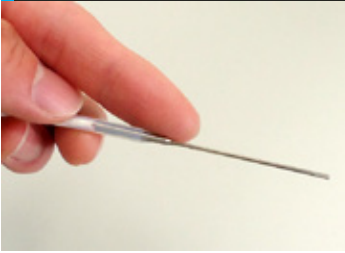

High Sensitivity Ultra-thin Sensor

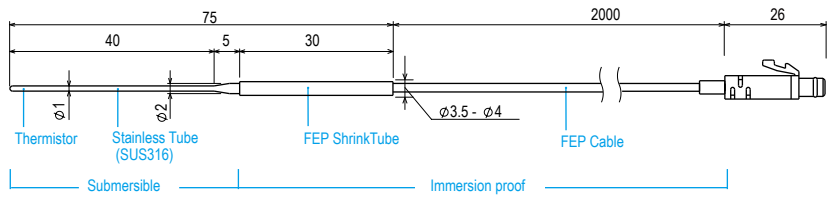

[Unit: mm]

Measurement Range	-60 to 155°C
Accuracy	Avg. ±0.5 °C at -20 to 60 °C Avg. ±1.0 °C at -60 to -20 °C , 60 to 80 °C Avg. ±2.0 °C at 80 to 155 °C
Response Time (90 %)	Approx. 50 sec. (in air) Approx. 1 sec. (in agitated water)
Waterproof Capacity	Submersible (stainless protection tube) Immersion proof (cable)
Notes	Can be extended by 3 meters with the Extension Cable TR-2C30

Pt Sensors



Model Number

TR-8 □□□ - □□ - □□□□ - □□ M

To order, create the model number by selecting A, B, C, and D (See below).

- A** Sensor Type (3 digits)
- B** Protection Tube Diameter (2 digits)
- C** Protection Tube Length (2-4 digits)
- D** Cable Length (1-2 digits)


Sensor Device	Pt100
Electrical Current	2 mA
Insulation Resistance	DC100 V over 100 MΩ (TR-8130 is over 10 MΩ at DC500 V)
Conductor	3 wire type
Range of Error	$\pm(0.15 + 0.002 \times t)^\circ\text{C}$ t = absolute value of measurement in °C
Waterproof Capacity	TR-8200: Waterproof Others: Only stainless protection tube is water resistant.

- Pt100 sensors are produced only upon order, therefore please allow approximately 1.5 months from time of order until shipping. The lead time varies depending on the specifications and quantity.
- The thermistor (temperature detection section) is mounted in the tip of the sensor.

A Sensor Type (Select from 4 types)

TR-8200 Waterproof Type

Measurement Range: -50 to 200 °C
Response Time (90 %)*: Approx. 13 seconds (In agitated water)

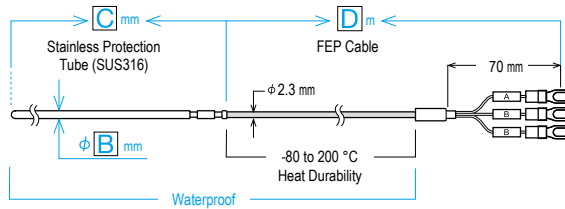

B Protection Tube Diameter

φ B mm	A Sensor Type			
	TR-8200	TR-8210	TR-8220	TR-8130
2.0	-	○	-	-
2.3	-	○	-	-
3.0	○	○	-	-
3.2	◎	◎	◎	◎
4.8	○	○	○	○
6.0	○	○	-	-
6.4	-	-	○	-

◎ Recommended ○ Available - Not Available

TR-8210 Regular Type

Measurement Range: -200 to 300 °C
Response Time (90 %)*: Approx. 6 seconds (In agitated water)

C Protection Tube Length


TR-8220: 50 to 2000 millimeters
Others: 50 to 1000 millimeters
Can be specified in 50 mm units.

TR-8220 Low to High Temp Type

Measurement Range: -200 to 500 °C
Response Time (90 %)*: Approx. 6 seconds (In agitated water)


D Cable Length

1 to 99 meters
Can be specified in 1 m units.

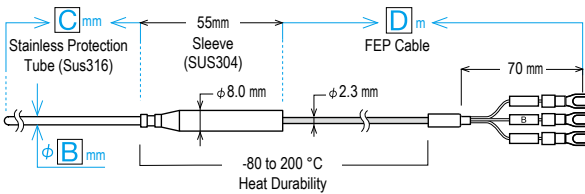

TR-8130 Handy Type

Measurement Range: -50 to 200 °C
Response Time (90 %)*: Approx. 6 seconds (In agitated water)

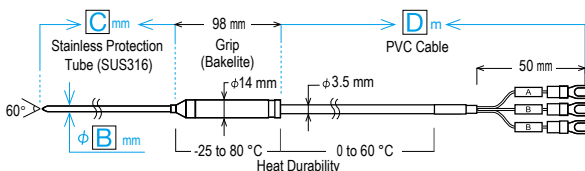


* Stated Response Time (90 %) is for sensors with a protection tube diameter of φ 3.2.

* Insulation Resistance of TR-8130 is over 10 MΩ at DC 500 V.

TR-1C30



Sensor Extension Cable

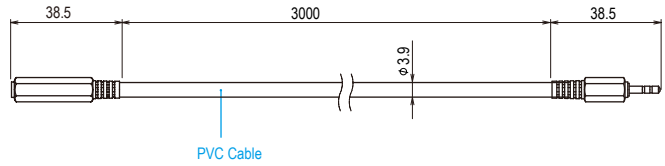


[Unit: mm]

Temperature Durability	-25 to 60 °C
Waterproof Capacity	None
Compatible Sensors	Temperature Sensor: TR-1106, TR-1220, TR-1320, TR-0106, TR-0206, TR-0306, TR-0406, TR-0506, TR-0706 Temp-Humidity Sensor: THA-3001, THA-3151, SHA-3151, HHA-3151 (Discontinued) Illuminance-UV Sensor: ISA-3151 Input Cable (Discontinued): VR-7101, VR-7102, VR-7103
Conditions for Use	Temperature sensors can use up to 3 meters of extension cables. Temp-Humidity sensors and Illuminance-UV sensors can use up to 9 meters of extension cables. Input cables can use multiple extension cables.

TR-2C30



Sensor Extension Cable

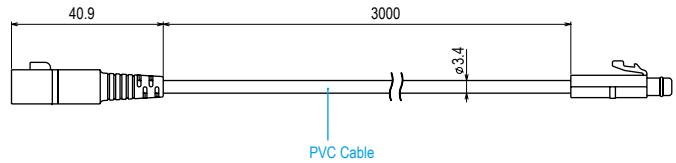


[Unit: mm]

Temperature Durability	-25 to 60 °C
Waterproof Capacity	Splash proof (rated for use in daily life)
Compatible Sensors	Temperature Sensor: TR-5101, TR-5106, TR-5220, TR-5320, TR-5420, TR-5530, TR-5620
Conditions for Use	Only one cable per sensor.

TR-5C10



Sensor Extension Cable

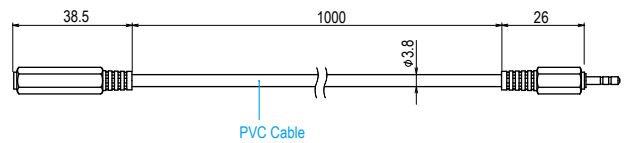

[Unit: mm]

Temperature Durability	-25 to 60 °C
Waterproof Capacity	None
Compatible Sensors	Temperature Sensor: TR-1106, TR-1220, TR-1320, TR-0106, TR-0206, TR-0306, TR-0406, TR-0506, TR-0706, Temp-Humidity Sensor: THA-3001, THA-3151, SHA-3151, TR-3100*, HHA-3151 (Discontinued) Illuminance-UV Sensor: ISA-3151
Conditions for Use	Temperature sensors can use up to 3 meters of extension cables. Temp-Humidity sensors and Illuminance-UV sensors can use up to 9 meters of extension cables. * Only 1 extension cable for TR-3100